

SPECIFICATIONS RTPBP 100 / 20 MWH


| PRESS | POWER | BORE | STROKE | RAM SPEED | | CAPACITY (TONS) | WEIGHT (LBS.) | SHIPPING DIMENSIONS | | |
|---------|---------------|------|--------|------------|---------|-----------------|---------------|---------------------|------|------|
| | | | | PRESS | RETURN | | | L | W | H |
| RTP-100 | 10 HP 3 phase | 9" | 16" | 19 IPM | 24 IPM | 100 | 6,000 | 68" | 102" | 100" |
| BP-20 | Same | 4" | 20" | * 22.5 IPM | 159 IPM | 20 | Same | Same | | |

Standard voltages available - please specify when ordering.
 10 HP 230 1 phase available.

ROLL-IN TABLE PRESS 100 Ton

STANDARD FEATURES

- ✓ **Powered movable table** for ease of loading & positioning workpiece under cylinder.
- ✓ **Powered movable workhead** for off-center work allows operator to position the cylinder from left to right with the touch of a lever.
- ✓ **Hydraulic power-lift** for vertical displacement of head assembly.
- ✓ **Cylinder activation** is fingertip controlled, the more the hand lever is engaged the more the ram movement is accelerated. This allows the operator to control the proper speed for the task.
- ✓ **Pressure regulator** to limit the ram pressure.

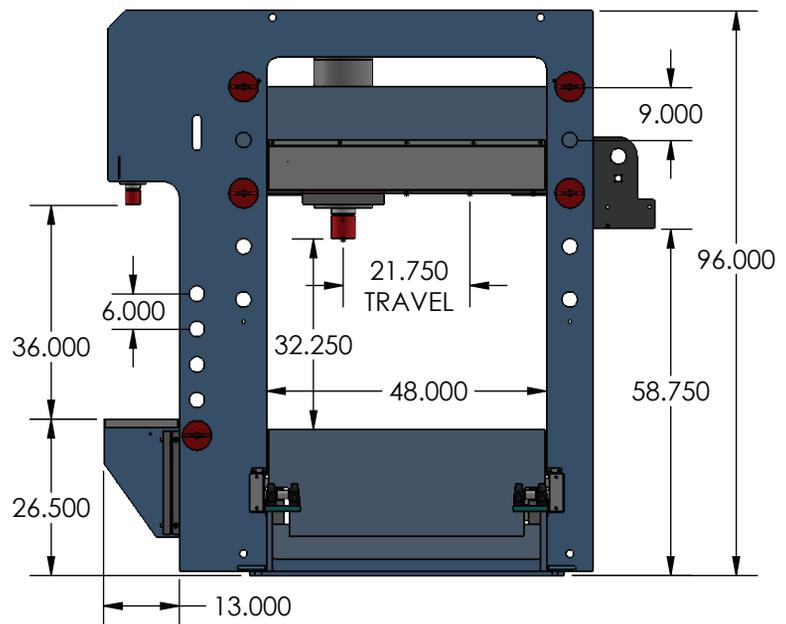

STANDARD FEATURES 20 TON BROACH

- ✓ **Pressure regulator** to limit the ram pressure.
- ✓ **Speed control** limits the maximum speed of ram travel, allowing operator to select the proper speed for the task.
- ✓ * **Factory speed set to 22.5 IPM (OSHA STD).** Capable of up to 97 IPM. We recommend using proper safety guarding.

AVAILABLE OPTIONS

- VB-100** V BLOCKS matched pair.
- FSG-100** Front safety guard for operator protection.
- SSE-100** Stop / Start c/w emergency stop button, wired direct to motor.
- PP-100** Pressing Plate

